



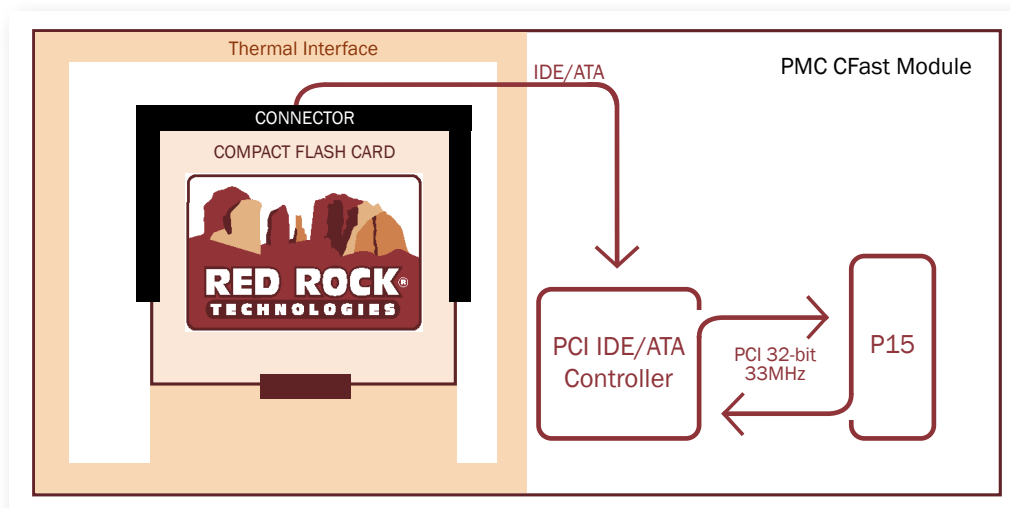

# RRT-PMC-CF-F-C PMC Compact Flash Module: Conduction Cooled

THE PMC COMPACT FLASH MODULE: CONDUCTION COOLED is a PMC mezzanine storage module with a PCI ATA/IDE controller that supports one fixed compact flash. Provides boot drive and/or disk storage for VPX, VME, CPCI, and ATCA single board computers (SBCs) with a PMC slot.

- PMC PCI 32-bit data at 33MHz/66MHz
- Capacities up to 512GB
- Conduction cooled
- Wide range of COTS Compact Flash options
- Compact Flash drive secured by rugged retainer clip
- Compatible with all SBCs with a PMC slot
- Meets XMC VITA 42 height requirements
- 3.3V and 5V PCI interface compliant
- Compact Flash with write protect switch available
- Front panel activity LEDs
- ROHS compliant

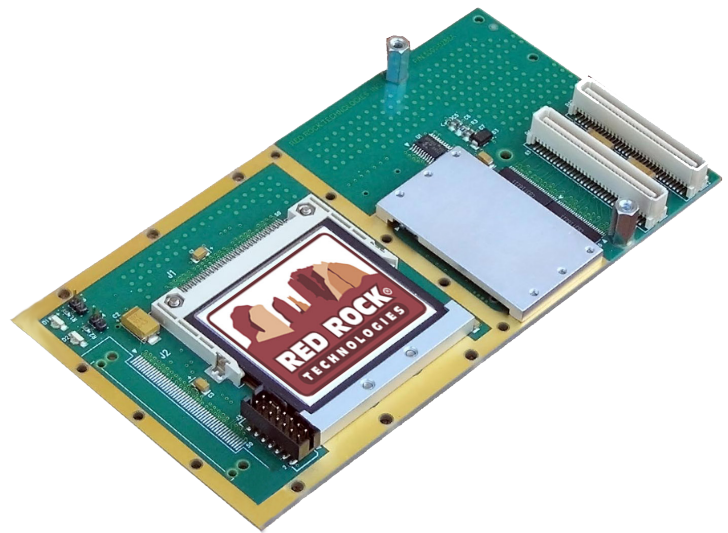

# Ordering Information

## PMC Compact Flash Module: Conduction Cooled

RRT-PMC-CF-F-C- X - UR

### Options May be left blank

#### Conformal Coating

UR	Polyurethane
AR	Acrylic

#### Extended Temperature Range

X	-40°C to 85°C
---	---------------

#### ORDER EXAMPLES

RRT-PMC-CF-F-C-UR  
RRT-PMC-CF-F-C-AR-X

## Compact Flash Drive

RRT-CF- SLC - 512GB - X - WP

### Options May be left blank

#### Write Protect

WP	Write Protect
----	---------------

#### Extended Temperature Range

X	-40°C to 85°C
---	---------------

#### Capacity

2GB - 64GB	SLC
8GB - 512GB	MLC

#### NAND Flash Type

SLC	Single Level Cell
MLC	Multi Level Cell

#### ORDER EXAMPLES

RRT-CF-MLC-512GB  
RRT-CF-SLC-60GB-X  
RRT-CF-MLC-128GB-WP



# Product Specifications

## PMC COMPACT FLASH MODULE: CONDUCTION COOLED

PERFORMANCE	
CAPACITIES	Up to 512GB
PMC INTERFACE	PMC PCI 32-bit data at 33MHz per IEEE 1386-2001
PMC INTERFACE SPEED	5 MB/s
COMPACT FLASH INTERFACE	ATA/ATAPI-6 PIO Mode 4 transfer rates
SECTOR SIZE	512 bytes
RELIABILITY	
MTBF - PMC MODULE <sup>1</sup>	3 million hours
POWER	
WATTS (ACTIVE)	2.5 W
ENVIRONMENTAL	
OPERATING TEMPERATURE	0 °C to 70 °C
EXTENDED OPERATING TEMPERATURE	-40°C to 85°C
STORAGE TEMPERATURE	-40°C to 85°C
RELATIVE HUMIDITY	5% to 95% non-condensing
SHOCK	20g, 11 millisecond terminal sawtooth pulse
VIBRATION	0.04g <sup>2</sup> /Hz, 100 Hz to 1000 Hz
PHYSICAL	
FORM FACTOR	PMC
WEIGHT	3.2 oz. (91g max)
NOTES	
(1) Telcordia SR-322, Issue 3, operating temp (40C), electrical stress (50%), environmental factor (1.0).	



Red Rock Technologies, Inc. reserves the right to modify, change or discontinue specific products within its product line at its own discretion. Red Rock Technologies, Inc. does not assume any liability resulting from the application or use of its products. The information contained herein has been checked and is believed to be entirely accurate; however, no responsibility is assumed for inaccuracies. "Red Rock Technologies" and the mountain logo are registered trademarks of Red Rock Technologies, Inc.

© Copyright 2024 Red Rock Technologies, Inc.  
All rights reserved. (Rev. 20240502a)