



RRT-XMC-SATA-CONTROLLER


XMC SATA Controller

- XMC PCIe Gen 2x2 interface per VITA 42.3
- Transfer rates up to 500 MB/s
- High performance SATA3 transfer rates
- Backwards compatible with SATA1 and SATA2
- 2 Independent SATA interfaces
- Standard 7-pin SATA interface
- LED indication for Power, Reset, and Activity
- Compatible with all SBCs with an XMC slot
- SATA cable secured by rugged retainer clip
- ROHS compliant
- -X version rated for -40°C to 85°C
- Robust design for extreme temperature, shock and vibration environments



THE XMC SATA CONTROLLER is an XMC Mezzanine card with a dual-channel PCIe Gen 2x2 SATA 3 controller with 2 SATA connectors via front panel.

Provides external boot drive and/or disk storage for VPX, VME, cPCI and ATCA single board computers (SBC) with XMC slot.

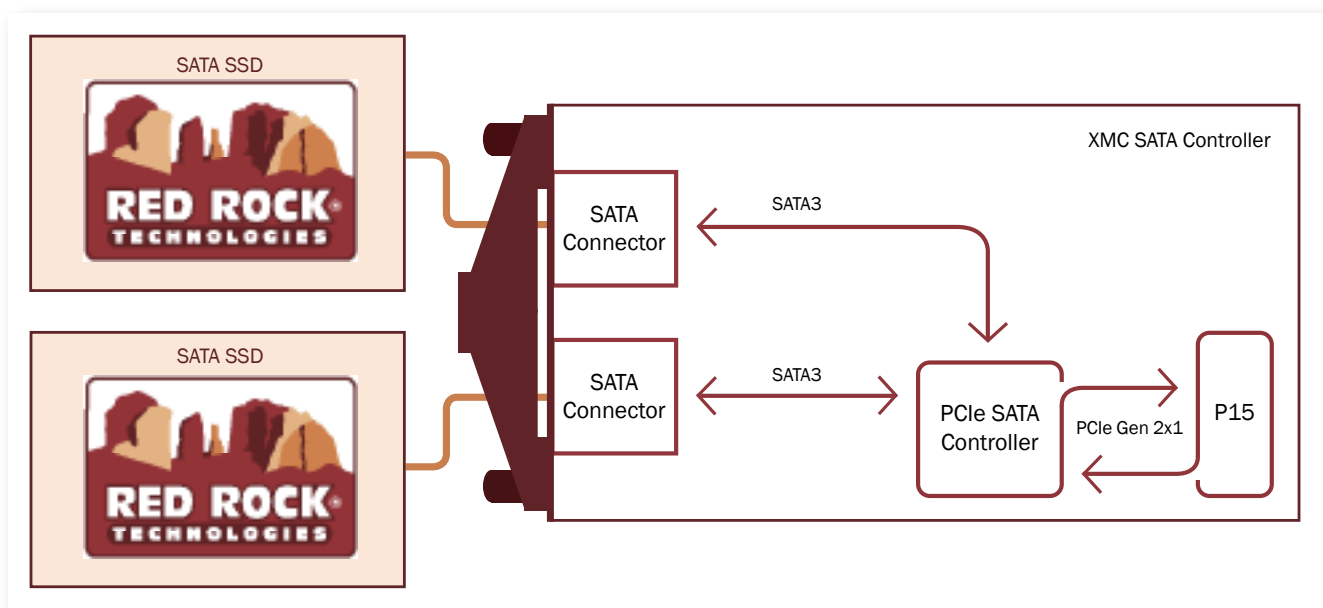

Ordering Information

XMC SATA Controller

RRT-XMC-SATA-CONTROLLER-UR - X

ORDER EXAMPLES

RRT-XMC-SATA-CONTROLLER
RRT-XMC-SATA-CONTROLLER-UR-X

Options May be left blank

Extended Temperature Range
X -40°C to 85°C

Conformal Coating
UR Polyurethane
AR Acrylic

Product Specifications

XMC PERFORMANCE	
INTERFACE	VITA 42.3/PCIe 2.0x1 Compliant
SPEED (PCIe GEN1/GEN2)	2.5/5 GBits/s
SATA PERFORMANCE	
INTERFACE	Supports SATA 1, 2 and 3 operation
SPEED	Up to 500 MB/s
RELIABILITY	
MTBF ¹	3 million hours
POWER	
VOLTAGE	VPWR +5V +/- 5% or +12V +/- 5%, +3.3+/- 0.3V
WATTS (IDLE)	1 W
WATTS (ACTIVE)	1.5 W
ENVIRONMENTAL	
OPERATING TEMPERATURE	0°C to 70°C
EXTENDED OPERATING TEMPERATURE ²	-40°C to 85°C
STORAGE TEMPERATURE	-55°C to 95°C
ALTITUDE	80,000 ft. (24,000 meters)
RELATIVE HUMIDITY	5% to 95% non-condensing
SHOCK	20g, 11 millisecond terminal sawtooth pulse
VIBRATION	0.04g ² /Hz, 100 Hz to 1000 Hz
PHYSICAL	
FORM FACTOR	XMC
WEIGHT	3.5 oz. (100g max)
NOTES	
(1) Telcordia SR-322, Issue 3, operating temp (40C), electrical stress (50%), environmental factor (1.0).	
(2) Thermal qualification per MIL-STD-810, Method 501 Procedure II, and MIL-STD-810, Method 502, Procedure II.	



Red Rock Technologies, Inc. reserves the right to modify, change or discontinue specific products within its product line at its own discretion. Red Rock Technologies, Inc. does not assume any liability resulting from the application or use of its products. The information contained herein has been checked and is believed to be entirely accurate; however, no responsibility is assumed for inaccuracies. "Red Rock Technologies" and the mountain logo are registered trademarks of Red Rock Technologies, Inc.

© Copyright 2024 Red Rock Technologies, Inc.
All rights reserved. (Rev. 20240502a)